





Highlight Features:


- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

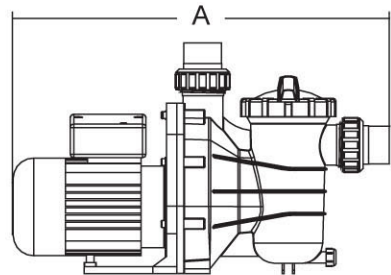

“SS” Series Pump

“SS” series swimming pool pump is designed for medium head installation in domestic pool and spa pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and energy consumption which requires minimal maintenance.

Technical Information

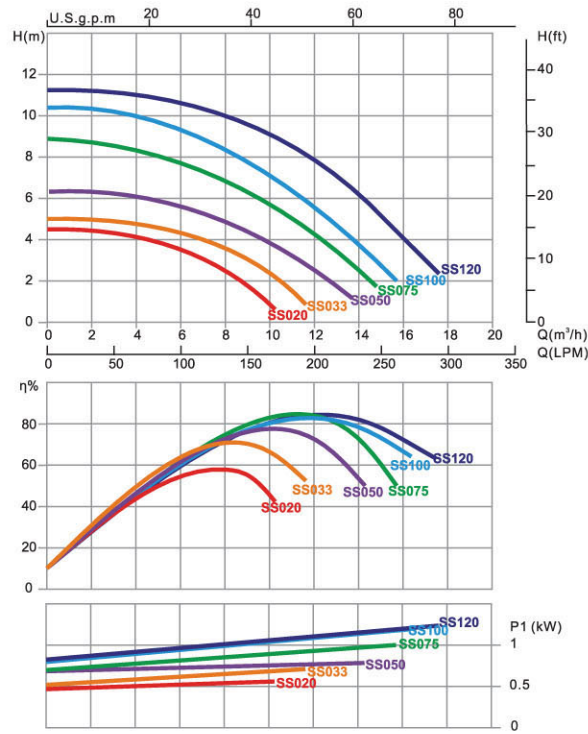

Product Information & Dimension

Code 220V/50Hz	Code 110V/60Hz	Model No	Connection Size	Input power	Horsepower
88022401	88022601	SS020	1.5 inch 50mm	0.28kW	0.2hp
88022402	88022602	SS033	1.5 inch 50mm	0.43kW	0.33hp
88022403	88022603	SS050	1.5 inch 50mm	0.55kW	0.50hp
88022404	88022604	SS075	1.5 inch 50mm	0.75kW	0.75hp
88022405	88022605	SS100	1.5 inch 50mm	0.90kW	1.0hp
88022406	88022606	SS120	1.5 inch 50mm	0.97kW	1.2hp

Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SS020	507	211	340	195	5μF	20μF	6.20
SS033	507	211	340	195	6μF	24μF	6.50
SS050	552	211	340	195	8μF	30μF	8.03
SS075	552	211	340	195	14μF	40μF	9.01
SS100	552	211	340	195	20μF	60μF	9.09
SS120	552	211	340	195	20μF	60μF	11.00

40/2 Soi 37/2, Kingkaew Road, Samutprakarn 10540, Thailand
Tel: +662-738-5088-99, +662-175-2561-65
Fax: +662-738 5299, +662-738-4209
Email: sales@poolspa.co.th, projects@poolspa.co.th
Website: www.poolspa.co.th



Photos are for reference only, contents are subject to change without prior notice.

SB / SC / SS Series Pump
By Emaux

with over 35 years of solid experience and expertise together with our devoted staffs, Emaux has evolved from a Swimming Pool and Spa Equipment manufacturer to a company that is focused in Water Technology. A company that provides solutions to clients in water related issues

Your solution in water technology






"SB" Series Pump

"SB" series heavy duty pump delivers high flow and energy efficiency ultra performance. It is suitable for commercial swimming pool. 2 inch suction and discharge port with transparent lid. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.

Technical Information

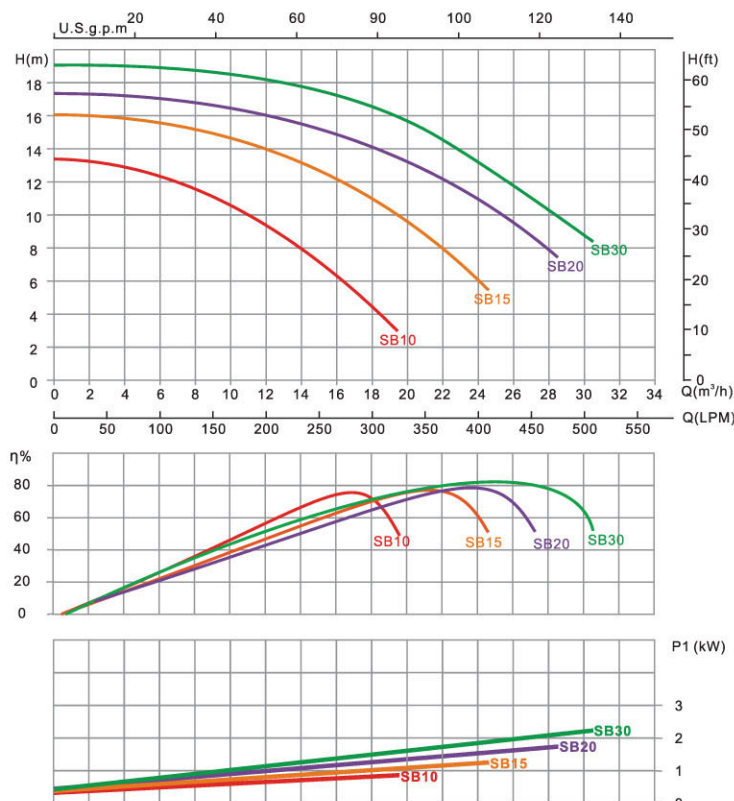

Remarks: Flow curve information based on 220V/50Hz and 380V/50Hz motor.



Product Information & Dimension

Code 220V/50Hz	Code 110V/60Hz	Code 380V/50Hz	Model No	Connection Size	Input power	Horsepower
88021305	88021505	88021605	SB10	2 inch 63mm	0.97kW	1.0hp
88021307	88021507	88021607	SB15	2 inch 63mm	1.30kW	1.5hp
88021308	88021508	88021608	SB20	2 inch 63mm	1.80kW	2.0hp
88021309	88021509	88021609	SB30	2 inch 63mm	2.18kW	3.0hp

Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SB10	717	275	413	248	25μF	90μF	16.00
SB15	717	275	413	248	25μF	90μF	17.00
SB20	717	275	413	248	30μF	100μF	23.00
SB30	717	275	413	248	35μF	100μF	24.00

Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- Available in 50Hz or 60Hz with 220V/380V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

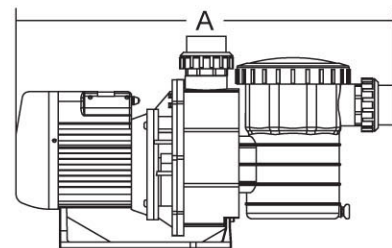

Photos are for reference only, contents are subject to change without prior notice.






"SC" Series Pump

"SC" series swimming pool pump is designed for medium head installation in medium or domestic pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and easy maintenance.

Technical Information

Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/380V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

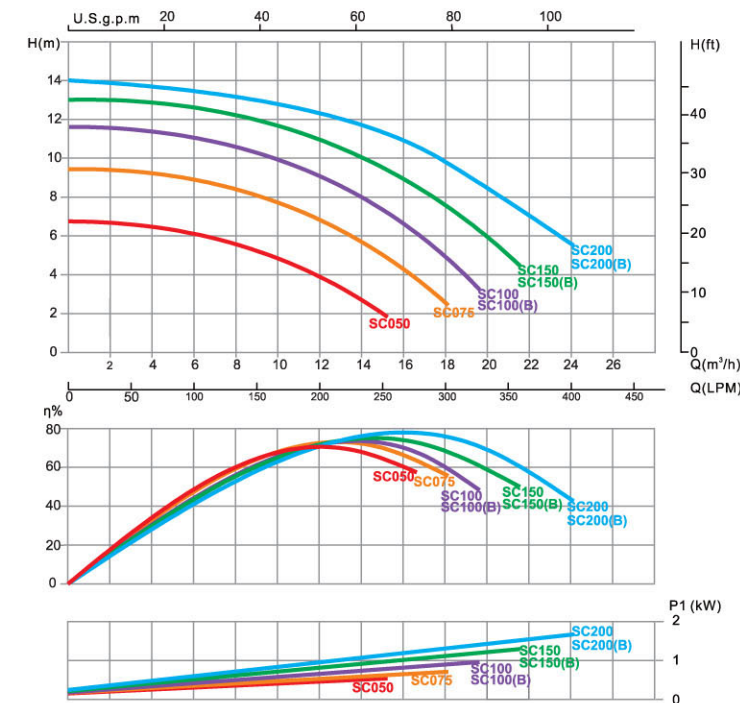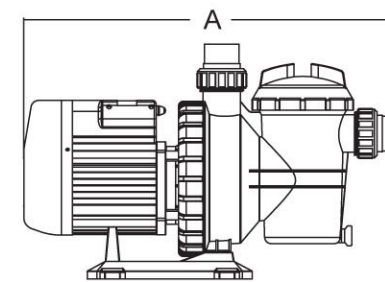

Remarks: Flow curve information based on 220V/50Hz and 380V/50Hz motor

Technical Information & Dimension

Code 220V/50Hz	Code 110V/60Hz	Code 380V/50Hz	Model No	Connection Size(IN)	Connection Size(OUT)	Input power	Horsepower
88021703	88021903	88022003	SC050	1.5 inch 50mm	1.5 inch 50mm	0.51kW	0.5hp
88021704	88021904	88022004	SC075	1.5 inch 50mm	1.5 inch 50mm	0.75kW	0.75hp
88021705	88021905	88022005	SC100	1.5 inch 50mm	1.5 inch 50mm	0.97kW	1.0hp
88021707	88021907	88022007	SC150	1.5 inch 50mm	1.5 inch 50mm	1.30kW	1.5hp
88021708	88021908	88022008	SC200	1.5 inch 50mm	1.5 inch 50mm	1.71kW	2.0hp
88027005	88027205	88027305	SC100(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	0.97kW	1.0hp
88027007	88027207	88027307	SC150(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	1.30kW	1.5hp
88027008	88027208	88027308	SC200(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	1.71kW	2.0hp

Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SC050	600	240	370	221	14μF	40μF	10.40
SC075	600	240	370	221	20μF	60μF	12.10
SC100	600	240	370	221	25μF	90μF	13.40
SC150	600	240	370	221	25μF	90μF	14.90
SC200	600	240	370	221	30μF	90μF	15.40
SC100(B)	610	240	370	221	25μF	90μF	13.40
SC150(B)	610	240	370	221	25μF	90μF	14.90
SC200(B)	610	240	370	221	30μF	90μF	15.40

Photos are for reference only, contents are subject to change without prior notice.